


AMS1500S

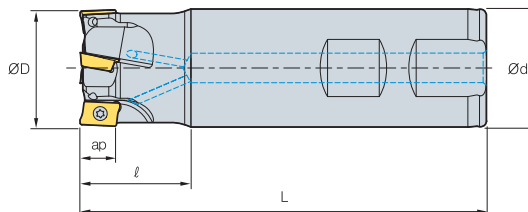

AA 90°
 • AR : 7.5°~12.5°
 • RR : -28°~-14°

Обозначение			øD	ød	l	L	ap	
AMS	15025HS-4S20	4	25	20	30	110	9	0.25
	15025HS-4S25	4	25	25	30	110	9	0.25
	15028HS	4	28	25	30	110	9	0.36
	15028HS-4L25	4	28	25	30	180	9	0.61
	15028HS-5	5	28	25	30	110	9	0.36
	15030HS	4	30	25	30	110	9	0.38
	15030HS-4L25	4	30	25	30	180	9	0.62
	15030HS-5	5	30	25	30	110	9	0.38
	15032HS	4	32	32	30	110	9	0.60
	15032HS-4L32	4	32	32	30	180	9	1.00
	15032HS-5	5	32	32	30	110	9	0.6
	15035HS	5	35	32	30	110	9	0.70
	15035HS-6	6	35	32	30	110	9	0.7
	15040HS-S32	5	40	32	35	130	9	0.80
	15040HS-5L32	5	40	32	35	200	9	1.20
	15040HS-6S32	6	40	32	35	130	9	0.8
	15040HS-S40	5	40	40	35	130	9	1.13
	15040HS-6S40	6	40	40	35	130	9	1.13
15040HS-S42	5	40	42	35	130	9	1.23	
15040HS-6S42	6	40	42	35	130	9	1.23	


Применяемые СМП

APMT-MM



Обозначение	Тв. сплав с покрытием									Кермет			Тв. сплав				Стр.
	NCM325	NCM335	NC5330	PC3500	PC5300	PC3545	PC9530	PC6510	PC215K	PD2000	CN2000	CN20	CN30	H01	G10	ST30A	
APMT 0903PDSR-MM			●	●	●	●											
090308PDSR-MM			●	●	●	●											
090312R-MM				●	●	●											
090316R-MM				●	●	●											
090320R-MM				●	●	●											

Комплектующие



FTKA02565S

TW08S

