


HSK63A AM1000HS/1500HS

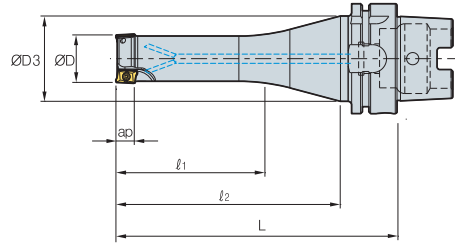

• AR : 7.5°~13°
• RR : -28°~7°

(мм)

Обозначение		$\varnothing D$	$\varnothing D3$	ℓ_1	ℓ_2	L	ap
HSK63A AM1010HS-2	2	10	43	35	83	116	5.6
	2	12	43	35	83	116	5.6
	3	12	43	35	83	116	5.6
	3	16	43	35	83	116	5.6
	4	16	43	35	83	116	5.6
	4	20	43	45	98	131	5.6
HSK63A AM1020HS-4	4	20	43	45	98	131	5.6
	5	20	43	45	98	131	5.6
HSK63A AM15016HS-2	2	16	43	45	83	116	9
	2	16	43	35	118	151	9
	2	20	43	60	98	131	9
	3	20	43	60	98	131	9
	2	20	43	50	118	151	9
	3	25	43	75	113	146	9
	4	25	43	75	113	146	9
	3	25	43	65	133	166	9
	4	32	43	80	113	146	9
	5	32	43	80	113	146	9
	4	32	43	70	133	166	9
	5	40	47	60	98	131	9
	6	40	47	60	98	131	9
	5	40	47	50	118	151	9


Применяемые СМП

APMT-MM



Тип	Обозначение	Тв. сплав с покрытием								Кермет			Тв. сплав				Стр.	
		NCM325	NCM335	NC5330	PC3500	PC5300	PC3545	PC9530	PC6510	PC215K	PD2000	CN2000	CN20	CN30	H01	G10		ST30A
1000 Тип	APMT 060202PDSR-MM			●	●	●	●											
	0602PDSR-MM			●	●	●	●											
	060208PDSR-MM			●	●	●	●											
	060212R-MM			●	●	●												
	060216R-MM			●	●													
1500 Тип	APMT 0903PDSR-MM			●	●	●	●											
	090308PDSR-MM			●	●	●	●											
	090312R-MM			●	●	●	●											
	090316R-MM			●	●													
	090320R-MM			●	●													

Комплектующие



Винт кассеты



Ключ



Ключ



Диаметр фрезы, мм

1000 Тип	FTKA01842	-	TW06S-A	$\varnothing 10\sim\varnothing 63$
1500 Тип	FTKA02565S	TW08S	-	$\varnothing 16\sim\varnothing 100$

Применяемые СМП смотреть на стр. E05

