



HRMDS09

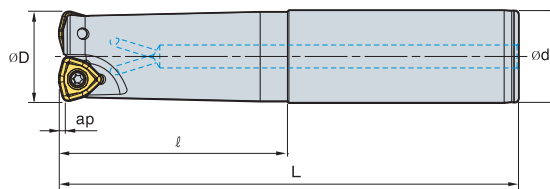

Обозначение			øD	ød	ℓ	L	ap	
HRMDS	0925HR-2S25	2	25	25	60	140	1.5	0.5
	0925HR-2M25	2	25	25	120	200	1.5	0.6
	0925HR-2L25	2	25	25	180	300	1.5	1
	0926HR-2S25	2	26	25	60	140	1.5	0.5
	0926HR-2M25	2	26	25	60	200	1.5	0.7
	0926HR-2L25	2	26	25	60	300	1.5	1
	0930HR-3S32	3	30	32	70	150	1.5	0.8
	0930HR-3M32	3	30	32	120	200	1.5	1
	0930HR-3L32	3	30	32	180	300	1.5	1.5
	0932HR-3S32	3	32	32	70	150	1.5	0.8
	0932HR-3M32	3	32	32	120	200	1.5	1.1
	0932HR-3L32	3	32	32	180	300	1.5	1.7
	0933HR-3S32	3	33	32	70	150	1.5	0.8
	0933HR-3M32	3	33	32	70	200	1.5	1.1
	0933HR-3L32	3	33	32	70	300	1.5	1.7
	0935HR-4S32	4	35	32	50	150	1.5	0.9
	0935HR-4M32	4	35	32	50	200	1.5	1.1
	0935HR-4L32	4	35	32	50	300	1.5	1.7
	0940HR-4S32	4	40	32	50	150	1.5	0.9
	0940HR-4M32	4	40	32	50	250	1.5	1.5
0940HR-4L32	4	40	32	50	300	1.5	1.8	
0940HR-4S40	4	40	40	60	150	1.5	1.3	

Применяемые СМП

WNMX-MM



Обозначение	Тв. сплав с покрытием								Кермет			Тв. сплав				Стр.		
	NCM325	NCM335	NC5330	PC3500	PC5300	PC3545	PC9530	PC6510	PC215K	PD2000	CN2000	CN20	CN30	H01	G10		ST30A	ST20
WNMX 09T316ZNN-MM				●	●	●	●											E21

Комплектующие



FTKA0307



TW09S

