


PAS2000/4000

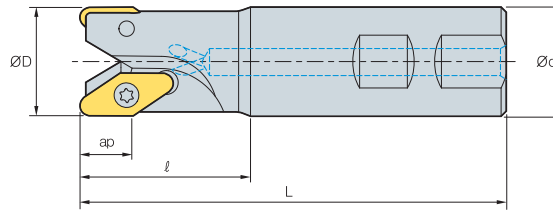

AA
90°
• AR : 0°~7°
• RR : -21°~3°

(мм)

Обозначение		ØD	Ød	ℓ	L	ap	kg
PAS 2012HR	1	12	16	25	85	8	0.1
	2	16	16	25	90	8	0.11
	2	20	20	30	100	8	0.2
	3	25	25	35	115	8	0.36
	4	32	32	40	125	8	0.66
PAS 2042HR	5	42	32	42	130	8	0.84
	2	32	32	50	125	15	0.6
	3	40	32	50	140	15	0.8
	3	40	40	60	150	15	1.2
	3	40	42	60	150	15	1.2

Применяемые СМП

VDKT-MA

VCKT-MA



Тип	Обозначение	Тв. сплав с покрытием									Кермет			Тв. сплав				Стр.	
		NCM325	NCM335	NC5330	PC3500	PC5300	PC3545	PC9530	PC6510	PC215K	PD2000	CN2000	CN20	CN30	H01	G10	ST30A		ST20
2000 Тип	VDKT 11T210N-MA														●				E21
4000 Тип	VCKT 220530N-MA														●				

Комплектующие



2000 Тип	ETNA02505*	TW 07S
4000 Тип	FTNC04509	TW 20S

* PAS2012 · 2016



Применяемые СМП смотреть на стр. E21



Присоединительные размеры смотреть на стр. E277~E279

korloy@korloy-tools.ru
www.korloy-tools.ru

● : Наличие на складе

