


# IFE4000 (Цилиндрическая стандартная форма)

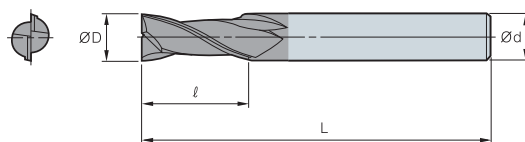

| ØD            | Предельное отклонение D |
|---------------|-------------------------|
| Ø1.0 ~ Ø8.0   | 0 ~ - 0.020             |
| Ø8.5 ~ Ø11.5  | 0 ~ - 0.025             |
| Ø12.0 ~ Ø20.0 | 0 ~ - 0.030             |

(mm)

| Обозначение         | ØD   | Ød | ℓ  | L   |
|---------------------|------|----|----|-----|
| <b>IFE</b>          |      |    |    |     |
| <b>4025-040</b>     | 2.5  | 6  | 8  | 40  |
| <b>4030-045</b>     | 3    | 6  | 8  | 45  |
| <b>4035-045</b>     | 3.5  | 6  | 10 | 45  |
| <b>4040-045</b>     | 4    | 6  | 11 | 45  |
| <b>4045-045</b>     | 4.5  | 6  | 11 | 45  |
| <b>4050-050</b>     | 5    | 6  | 13 | 50  |
| <b>4055-050</b>     | 5.5  | 6  | 13 | 50  |
| <b>4060-050</b>     | 6    | 6  | 13 | 50  |
| <b>4065-060</b>     | 6.5  | 8  | 16 | 60  |
| <b>4070-060</b>     | 7    | 8  | 16 | 60  |
| <b>4075-060</b>     | 7.5  | 8  | 16 | 60  |
| <b>4080-060</b>     | 8    | 8  | 19 | 60  |
| <b>4085-070</b>     | 8.5  | 10 | 19 | 70  |
| <b>4090-070</b>     | 9    | 10 | 19 | 70  |
| <b>4095-070</b>     | 9.5  | 10 | 19 | 70  |
| <b>4100-070</b>     | 10   | 10 | 22 | 70  |
| <b>4105-075</b>     | 10.5 | 12 | 22 | 75  |
| <b>4110-075</b>     | 11   | 12 | 22 | 75  |
| <b>4115-075</b>     | 11.5 | 12 | 22 | 75  |
| <b>4120-075</b>     | 12   | 12 | 26 | 75  |
| <b>4130-085</b>     | 13   | 16 | 26 | 85  |
| <b>4140-085-S14</b> | 14   | 14 | 26 | 85  |
| <b>4140-085</b>     | 14   | 16 | 26 | 85  |
| <b>4150-090</b>     | 15   | 16 | 26 | 90  |
| <b>4160-100</b>     | 16   | 16 | 32 | 100 |
| <b>4180-100-S18</b> | 18   | 18 | 32 | 100 |
| <b>4180-100</b>     | 18   | 20 | 32 | 100 |
| <b>4200-105</b>     | 20   | 20 | 38 | 105 |