


# IFE2000-T (Коническая форма)



ØD	Предельные отклонения D
Ø1.0 ~ Ø8.0	0 ~ -0.020
Ø8.5 ~ Ø11.5	0 ~ -0.025
Ø12.0 ~ Ø20.0	0 ~ -0.030

Обозначение		ØD	Ød	L	ℓ	θ°
IFE	<b>2120-075-T30</b>	12	16	75	30	3°
	<b>2130-075-T05</b>	13	14	75	30	0.5°
	<b>2130-075-T10</b>	13	14	75	30	1°
	<b>2130-075-T15</b>	13	16	75	30	1.5°
	<b>2130-075-T20</b>	13	16	75	30	2°
	<b>2130-075-T25</b>	13	16	75	30	2.5°
	<b>2130-075-T30</b>	13	18	75	30	3°
	<b>2140-080-T05</b>	14	16	80	35	0.5°
	<b>2140-080-T10</b>	14	16	80	35	1°
	<b>2140-080-T15</b>	14	16	80	35	1.5°
	<b>2140-080-T20</b>	14	18	80	35	2°
	<b>2140-080-T25</b>	14	18	80	35	2.5°
	<b>2140-080-T30</b>	14	18	80	35	3°
	<b>2150-080-T05</b>	15	18	80	35	0.5°
	<b>2150-080-T10</b>	15	18	80	35	1°
	<b>2150-080-T15</b>	15	18	80	35	1.5°
	<b>2150-080-T20</b>	15	18	80	35	2°
	<b>2150-080-T25</b>	15	20	80	35	2.5°
	<b>2150-080-T30</b>	15	20	80	35	3°
	<b>2160-090-T05</b>	16	20	90	40	0.5°
<b>2160-090-T10</b>	16	20	90	40	1°	
<b>2160-090-T15</b>	16	20	90	40	1.5°	
<b>2160-090-T20</b>	16	20	90	40	2°	
<b>2160-090-T25</b>	16	20	90	40	2.5°	
<b>2160-090-T30</b>	16	22	90	40	3°	

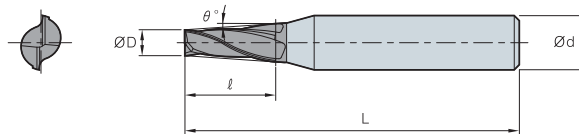