


FE4000 (Цилиндрическая стандартная форма)

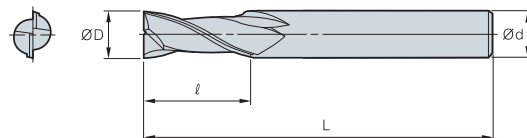

ØD	Предельные отклонения D
Ø1.0 ~ Ø8.0	0 ~ -0.020
Ø8.5 ~ Ø11.5	0 ~ -0.025
Ø12.0 ~ Ø20.0	0 ~ -0.030

(mm)				
Обозначение	ØD	Ød	ℓ	L
FE				
4025-040	2.5	6	8	40
4030-045	3	6	8	45
4035-045	3.5	6	10	45
4040-045	4	6	11	45
4045-045	4.5	6	11	45
4050-050	5	6	13	50
4055-050	5.5	6	13	50
4060-050	6	6	13	50
4065-060	6.5	8	16	60
4070-060	7	8	16	60
4075-060	7.5	8	16	60
4080-060	8	8	19	60
4085-070	8.5	10	19	70
4090-070	9	10	19	70
4095-070	9.5	10	19	70
4100-070	10	10	22	70
4105-075	10.5	12	22	75
4110-075	11	12	22	75
4115-075	11.5	12	22	75
4120-075	12	12	26	75
4130-085	13	16	26	85
4140-085-S14	14	14	26	85
4140-085	14	16	26	85
4150-090	15	16	26	90
4160-100	16	16	32	100
4180-100-S18	18	18	32	100
4180-100	18	20	32	100
4200-105	20	20	38	105