
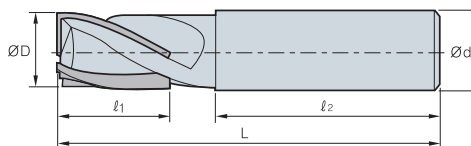


Фрезы концевые с напайными пластинами

ZSE200 / 300 (Цилиндрическая форма)



ØD	Предельные отклонения D
All	0 ~ - 0,050

(mm)

Обозначение	ØD	Ød	l ₁	l ₂	L
ZSE					
2 214	14	16	28	57	95
215	15	16	28	57	95
216(Q)	16	16	28	55	95
217	17	20	30	70	115
218	18	20	30	70	115
219	19	20	30	70	115
220(Q)	20	20	30	70	115
221	21	20	35	65	115
222	22	20	35	65	115
223	23	25	35	75	125
224	24	25	35	75	125
225	25	25	35	75	125
226(Q)	26	25	35	75	125
227	27	25	35	75	125
228	28	25	35	75	125
229	29	32	40	95	150
230(Q)	30	32	40	95	150
231	31	32	40	95	150
232	32	32	45	90	150
233	33	32	45	90	150
234	34	32	50	85	150
235	35	32	50	85	150
236	36	32	50	85	150
237	37	32	55	80	150
238	38	32	55	80	150
238S	38	42	55	80	150
240(Q)	40	32	60	75	150
240S	40	42	60	75	150
242	42	32	60	75	150
244	44	32	65	80	160
245	45	32	65	80	160
245S	45	42	65	80	160
247	47	32	65	80	160
248	48	32	65	80	160
248S	48	42	65	80	160
250	50	32	65	80	160
250S	50	42	65	80	160
ZSE					
3 314	14	16	28	57	95
315	15	16	28	57	95
316	16	16	28	55	95
317	17	20	30	70	115
318	18	20	30	70	115
319	19	20	30	70	115
320	20	20	30	70	115
322	22	20	35	65	115
325	25	25	35	75	125
326	26	25	35	75	125
328	28	25	35	75	125
330	30	32	40	95	150
331	31	32	40	95	150

Заказ специальных (нестандартных) фрез : ZSE○○○○○H-L

Пример 1) 2 зуба, диаметр : 6.3, l : 10, L : 60 ZSBE2063 10-60L

Пример 1) 2 зуба, диаметр : 6.3, standard type ZSE2063

korloy@korloy-tools.ru
www.korloy-tools.ru