


WPDC-5D/6.5D/8D

Стандартный тип

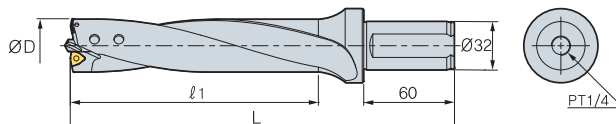

(мм)

Обозначение		ØD	5D		6.5D		8D		СМП	Сверло центровочное
			ℓ1	L	ℓ1	L	ℓ1	L		
WPDC	250-32-□	25	150	240	185	275	220	310	WCPT030204-C21	CD0630
	260-32-□	26	150	240	185	275	220	310	WCPT040204-C21	
	270-32-□	27	150	240	185	275	220	310		
	280-32-□	28	150	240	185	275	220	310		
	290-32-□	29	150	240	185	275	220	310		
	300-32-□	30	150	240	185	275	220	310		
	310-32-□	31	175	265	218	308	260	350	WCPT050308-C21	CD0835
	320-32-□	32	175	265	218	308	260	350		
	330-32-□	33	175	265	218	308	260	350		
	340-32-□	34	175	265	218	308	260	350		
	350-32-□	35	175	265	218	308	260	350		
	360-32-□	36	200	290	250	340	300	390		
	370-32-□	37	200	290	250	340	300	390		
	380-32-□	38	200	290	250	340	300	390		
	390-32-□	39	200	290	250	340	300	390		
	400-32-□	40	200	290	250	340	300	390		

Применяемые СМП смотреть на стр.G05

* Возможность заказа сверл нестандартного диаметра
Пример: сверление отверстия диаметром 32,5 мм * 6.5D - WPDC325-32-96.5

