


I Патроны цанговые

HSK-HDC


Класс точности балансировки
G2,5; $n_{max} = 30.000$ об/мин

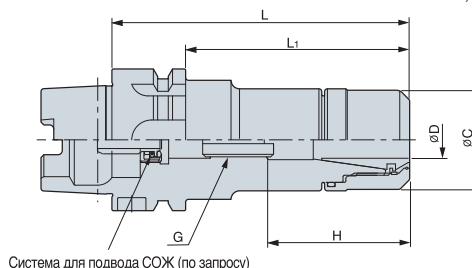

Обозначение	ØD	ØC	ØC1	L	L1	H	G	Цанга	Максимальная частота вращения, об/мин	kg
HSK40A-HDC10- 60	1.0~10.0	30	31	60	40	34	M10	GER16HP	30,000	0.2
HDC10- 90	1.0~10.0	30	31	90	70	45	M10	GER16HP	30,000	0.2
HDC13- 75	1.0~13.0	35	35	75	55	49	M13	GER20HP	30,000	0.2
HDC13-105	1.0~13.0	35	35	105	90	54	M13	GER20HP	30,000	0.2
HSK50A-HDC10- 60	1.0~10.0	30	31	60	34	34	M10	GER16HP	30,000	0.3
HDC10- 90	1.0~10.0	30	31	90	64	45	M10	GER16HP	30,000	0.4
HDC13- 75	1.0~13.0	35	35	75	49	49	M13	GER20HP	25,000	0.8
HDC13-105	1.0~13.0	35	35	105	79	54	M13	GER20HP	25,000	1.2
HSK63A-HDC10- 60	1.0~10.0	30	31	60	34	34	M10	GER16HP	25,000	0.8
HDC10- 90	1.0~10.0	30	31	90	64	45	M10	GER16HP	25,000	1.0
HDC13- 75	1.0~13.0	35	35	75	49	49	M13	GER20HP	20,000	1.2
HDC13-105	1.0~13.0	35	35	105	79	54	M13	GER20HP	20,000	1.4
HSK100A-HDC10- 90	1.0~10.0	30	31	90	61	34	M10	GER16HP	15,000	2.4
HDC10-120	1.0~10.0	30	31	120	91	45	M10	GER16HP	15,000	2.7
HDC13- 90	1.0~13.0	35	35	90	61	49	M13	GER20HP	15,000	3.0
HDC13-120	1.0~13.0	35	35	120	91	54	M13	GER20HP	15,000	3.2

BT-HDC

Balanced G2.5 Max. 30,000rpm
MAS403-BT

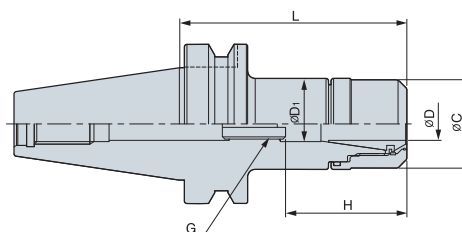

Обозначение	ØD	ØC	ØC1	L	H	G	Цанга	Максимальная частота вращения, об/мин	kg
BT30-HDC10-55	1.0~10.0	30	31	55	45	M10	GER16HP	30,000	0.5
HDC10-75	1.0~10.0	30	31	75	45	M10	GER16HP	30,000	0.5
HDC13-55	1.0~13.0	35	35	55	49	M13	GER20HP	25,000	0.5
HDC13-75	1.0~13.0	35	35	75	49	M13	GER20HP	25,000	0.6
BT40-HDC10-60	1.0~10.0	30	31	60	45	M10	GER16HP	25,000	1.1
HDC10-90	1.0~10.0	30	31	90	45	M10	GER16HP	25,000	1.2
HDC13-60	1.0~13.0	35	35	60	49	M13	GER20HP	20,000	1.1
HDC13-90	1.0~13.0	35	35	90	49	M13	GER20HP	20,000	1.5

Комплектующие

Патрон	Комплектующие			
	Входящие в базовую комплектацию		Не входящие в базовую комплектацию	
	Гайка	Винт регулировочный	Ключ	Цанга GER
Серия				
HDC10	PRG16	BN1025F	NSW30	GER 16-ØDHP
HDC13	PRG20	BN1325F	NSW35	GER 20-ØDHP

