
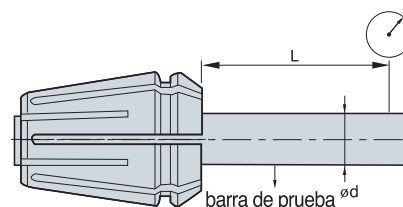


I Цанги

Серия GER

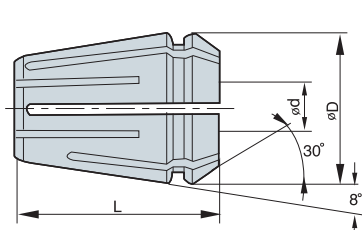

Геометрические размеры цанг серии ER

(мм)

Обозначение	№ цанги	ØD	L	Ød (Max.)	Диаметр зажима, мм		
					От	До	Шаг
GER 11-Ød	11	11.5	18.0	7.0	1.0	2.5	0.5
					3.0	7.0	0.5
16-Ød	16	17.0	27.5	10.0	1.0	2.5	0.5
					3.0	10.0	1.0
					3.5	9.5	1.0
20-Ød	20	21.0	31.5	13.0	1.0	2.5	0.5
					3.0	13.0	1.0
					3.5	12.5	1.0
25-Ød	25	26.0	34.0	16.0	1.0	2.5	0.5
					3.0	16.0	1.0
					3.5	15.5	1.0
32-Ød	32	33.0	40.0	20.0	2.0	2.5	0.5
					3.0	20.0	1.0
					3.5	19.5	1.0
40-Ød	40	41.0	46.0	26.0	3.0		
					4.0	26.0	1.0
					3.5	25.5	1.0

Точность

(мм)

Обозначение	№ цанги	ØD	L	Ød (Max.)	Диаметр зажима, мм		
					От	До	Шаг
GER 11-Ød	11	11.5	18.0	7.0	1.0	1.5	0.5
					2.0	2.5	0.5
					3.0	7.0	0.5
16-Ød	16	17.0	27.5	10.0	1.0	1.5	0.5
					2.0	2.5	0.5
					3.0	10.0	1.0
20-Ød	20	21.0	31.5	13.0	3.5	9.5	1.0
					2.0	2.5	0.5
					3.0	13.0	1.0
25-Ød	25	26.0	34.0	16.0	3.5	12.5	1.0
					2.0	2.5	0.5
					3.0	16.0	1.0
32-Ød	32	33.0	40.0	20.0	3.5	15.5	1.0
					2.0	2.5	0.5
					3.0	20.0	1.0
40-Ød	40	41.0	46.0	26.0	3.5	19.5	1.0
					3.0		
					4.0	26.0	1.0
					3.5	25.5	1.0

Точность

(мм)

Clamping Range	L	Радиальное биение на длине L		
		ER	GER	GER-HP
0.5 ~ 1.6	6.0	10µm	5µm	2µm
0.6 ~ 3.0	10.0	10µm	5µm	2µm
0.3 ~ 6.0	16.0	10µm	5µm	2µm
0.6 ~ 10.0	25.0	10µm	5µm	2µm
10.0 ~ 18.0	40.0	10µm	5µm	2µm
18.0 ~ 26.0	50.0	10µm	5µm	2µm
26.0 ~ 34.0	60.0	15µm	5µm	-

точность : 03,00 RD GER32-B

• Повышенная точность

Точность : 03,00 RD GER32-HP