


Патроны цанговые серии DSK I

BT-DSK

MAS403-BT

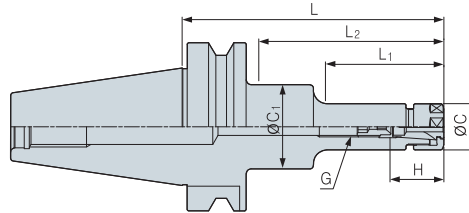

(мм)											
Обозначение	ØD	ØC	ØC1	L	L1	L2	H	G	Цанга	Шаг диаметров цанг, мм	kg
BT30 - DSK 6 - 60	2.75~6.0	19.5	19.5	60	33	33	35	M8	HC6	0.5	0.7
- 90	2.75~6.0	19.5	32	90	56	65	35	M8	HC6	0.5	0.8
DSK10 - 60	2.75~10.0	27.5	27.5	60	35	35	50	M12	HC10	0.5	0.9
- 90	2.75~10.0	27.5	27.5	90	65	65	50	M12	HC10	0.5	1.0
- 120	2.75~10.0	27.5	27.5	120	95	95	50	M12	HC10	0.5	1.1
DSK16 - 60	2.75~16.0	40	40	60	37	37	60	M12	HC16	0.5	1.1
- 90	2.75~16.0	40	40	90	67	67	60	M18	HC16	0.5	1.2
- 120	2.75~16.0	40	40	120	97	97	60	M18	HC16	0.5	1.3
DSK20 - 75	3.5~20.0	48	48	75	52	52	70	M12	HC20	0.5	1.1
- 90	3.5~20.0	48	48	90	67	67	70	M18	HC20	0.5	1.2
BT40 - DSK 6 - 60	2.75~6.0	19.5	19.5	60	30	30	35	M8	HC6	0.5	1.0
- 90	2.75~6.0	19.5	32	90	51	60	35	M8	HC6	0.5	1.1
- 120	2.75~6.0	19.5	32	120	60	90	35	M8	HC6	0.5	1.4
- 150	2.75~6.0	19.5	25	150	60	120	35	M8	HC6	0.5	1.5
DSK10 - 60	2.75~10.0	27.5	27.5	60	32	32	50	M12	HC10	0.5	1.1
- 90	2.75~10.0	27.5	40	90	48	60	50	M12	HC10	0.5	1.2
- 120	2.75~10.0	27.5	40	120	73	90	50	M12	HC10	0.5	1.4
- 150	2.75~10.0	27.5	34.5	150	73	118	50	M12	HC10	0.5	1.6
- 180	2.75~10.0	27.5	39	180	73	148	50	M12	HC10	0.5	1.6
DSK16 - 60	2.75~16.0	40	40	60	32	32	60	M12	HC16	0.5	1.3
- 90	2.75~16.0	40	40	90	58	58	60	M18	HC16	0.5	1.5
- 120	2.75~16.0	40	40	120	88	88	60	M18	HC16	0.5	1.7
- 150	2.75~16.0	40	40	150	118	118	60	M18	HC16	0.5	1.9
- 180	2.75~16.0	40	40	180	148	148	60	M18	HC16	0.5	2.0
DSK20 - 60	3.5~20.0	48	48	60	32	32	60	M12	HC20	0.5	1.3
- 90	3.5~20.0	48	48	90	60	60	70	M22	HC20	0.5	1.6
- 120	3.5~20.0	48	48	120	90	90	70	M22	HC20	0.5	2.0
DSK25 - 90	15.5~25.0	55	55	90	61	61	75	M28	HC25	0.5	1.8
- 120	15.5~25.0	55	55	120	91	91	85	M28	HC25	0.5	2.0
BT50- DSK6 - 105	2.75~6.0	19.5	32	105	55	64	35	M8	HC6	0.5	3.8
- 135	2.75~6.0	19.5	32	135	60	92	35	M8	HC6	0.5	3.9
- 165	2.75~6.0	19.5	32	165	60	114	35	M8	HC6	0.5	4.0
DSK10 - 105	2.75~10.0	27.5	27.5	105	57	57	50	M12	HC10	0.5	4.2
- 135	2.75~10.0	27.5	32	135	70	92	50	M12	HC10	0.5	4.4
- 165	2.75~10.0	27.5	32	165	75	114	50	M12	HC10	0.5	4.6
- 195	2.75~10.0	27.5	36	195	75	146	50	M12	HC10	0.5	4.8
DSK16 - 105	2.75~16.0	40	40	110	62	62	60	M18	HC16	0.5	4.7
- 135	2.75~16.0	40	40	135	92	92	60	M18	HC16	0.5	4.9
- 165	2.75~16.0	40	50	165	90	122	60	M18	HC16	0.5	5.1
- 195	2.75~16.0	40	52	195	90	152	60	M18	HC16	0.5	5.5
DSK20 - 105	3.5~20.0	48	48	105	62	62	70	M22	HC20	0.5	4.3
- 135	3.5~20.0	48	48	135	92	92	70	M22	HC20	0.5	4.6
- 165	3.5~20.0	48	48	165	122	122	70	M22	HC20	0.5	5.0
DSK25 - 105	15.5~25.0	55	55	105	62	62	85	M28	HC25	0.5	5.2
- 135	15.5~25.0	55	55	135	92	92	85	M28	HC25	0.5	5.4
- 165	15.5~25.0	55	55	165	122	122	85	M28	HC25	0.5	5.6

- Неизменность усилия зажима инструмента в процессе механической обработки.
- Возможность заказа балансированных патронов.
- Комплектующие: стр. I 36.

