
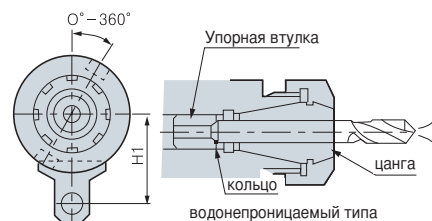


I Патроны с независимым подводом СОЖ

※ Обработка для Зубчатой передачи(внутренний)

OHDC

MAS403-BT


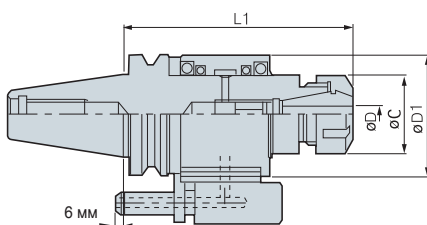


Обозначение	Диапазон диаметров растачивания ØD, мм		ØC	D1	L1	H1	Цанга	kg
	min	max						
BT40 - OHDC10-165	4.0	10.0	28	90	165	65	ER16C	3.6
OHDC20-165	8.0	20.0	50	90	165	65	ER32C	3.7
OHDC26-170	10.0	26.0	63	90	170	65	ER40C	3.8
BT50 - OHDC10-175	4.0	10.0	28	105	175	80	ER16C	7.3
OHDC20-180	8.0	20.0	50	105	180	80	ER32C	7.5
OHDC26-175	10.0	26.0	63	105	175	80	ER40C	7.7

- Цанги смотреть на стр. I 31, I 32
- Ключи смотреть на стр. I 21

OHSL

MAS403-BT

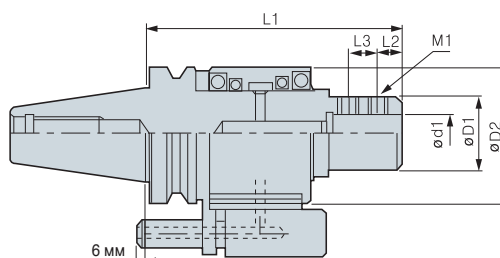

Обозначение	Ød1	ØD1	ØD2	L1	H1	L2	L3	M1	kg
BT40-OHSL16-160	16	48	90	160	65	-	25	M12 x 1.75	3.8
OHSL20-160	20	48	90	160	65	-	25	M12 x 1.75	3.9
OHSL25-175	25	48	90	175	65	15	20	M12 x 1.75	4.1
OHSL32-175	32	50	90	175	65	15	20	M10 x 1.5	4.7
BT50-OHSL16-170	16	48	105	170	80	-	25	M12 x 1.75	7.6
OHSL20-170	20	48	105	170	80	-	25	M12 x 1.75	7.8
OHSL25-180	25	55	105	180	80	15	20	M12 x 1.75	8.0
OHSL32-180	32	60	105	180	80	15	20	M12 x 1.75	8.2
OHSL40-180	40	65	105	180	80	15	20	M12 x 1.75	8.4

