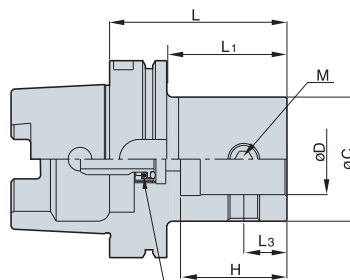


I Модульная оснастка

HSK-MD

DIN 69893-1, ISO 12164-1 : 2001

Система подвода СОЖ
(заказывается отдельно)

(мм)

Обозначение	ØD	ØC	L	L1	L3	H	K
HSK 50A- MD19F- 60	11	19	60	36	6.5	15	M5
MD25F- 60	14	25	60	34	8	23	M6
MD32F- 70	18	32	70	44	11	28	M8
MD40F- 75	22	40	75	49	13	33	M10
MD50F- 95	28	50	95	69	17	44	M12
HSK 63A- MD19F- 60	11	19	60	36	6.5	15	M5
MD25F- 60	14	25	60	34	8	23	M6
MD32F- 65	18	32	65	39	11	28	M8
MD40F- 70	22	40	70	44	13	33	M10
MD50F- 85	28	50	85	59	17	44	M12
MD63F- 95	36	63	95	69	22	54	M16
HSK100A-MD19F- 60	11	19	60	36	6.5	15	M5
MD25F- 60	14	25	60	36	8	23	M6
MD32F- 65	18	32	65	36	11	28	M8
MD40F- 70	22	40	70	41	13	33	M10
MD50F- 80	28	50	80	51	17	44	M12
MD63F- 90	36	63	90	61	22	54	M16
MD80F- 105	45	80	105	76	27	65	M16
MD90F- 105	45	90	105	76	27	65	M16

Комплектующие

Базовая оправка	Комплектующие	
	Входящие в базовую комплектацию	Не входящие в базовую комплектацию
	Винт монтажный	Ключ
Серия		
MD19F	BTT0506F	LW-2.5
MD25F	BTT0608F	LW-3
MD32F	BTT0810F	LW-4
MD40F	BTT1013F	LW-5
MD50F	BTT1215F	LW-6
MD63F	BTT1620F	LW-8
MD80F	BTT1626F	LW-8
MD90F	BTT1631F	LW-8

