


Кукурузные сборные фрезы с хвостовиком ВТ

ВТ30/40 АМ1000/1500

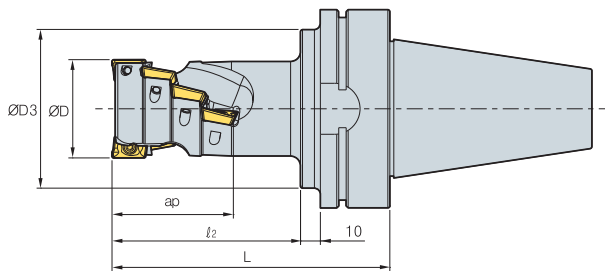

• AR : -12.5°~13°
• RR : -17°~6°


(мм)

Обозначение		$\varnothing D$	$\varnothing D_3$	l_2	L	Количество зубьев	a_p	
ВТ30	АМ1016015-2	6	16	80	30	62	2	15.5
	АМ1020020-3	12	20	80	32	64	3	20.5
	АМ1025025-4	20	25	80	39	71	4	25.5
ВТ40	АМ1016015-2	6	16	80	30	67	2	15.5
	АМ1020020-3	12	20	80	32	69	3	20.5
	АМ1025025-4	20	25	80	39	76	4	25.5
ВТ30	АМ15020026-1	3	20	80	42	74	1	26.5
	АМ15025035-2	8	25	80	50	62	2	35
	АМ15032044-2	10	32	80	60	92	2	44
ВТ40	АМ15020026-1	3	20	80	42	79	1	26.5
	АМ15025035-2	8	25	80	50	87	2	35
	АМ15032044-2	10	32	80	60	97	2	44


Применяемые СМП

Тип	Обозначение	Тв. сплав с покрытием								Кермет			Тв. сплав				Стр.	
		NCM325	NCM335	NC6330	PC3500	PC5300	PC5400	PC5545	PC9530	PC6510	PD2000	CN2000	CN20	CN30	H01	G10		ST30A
1000 Тип	APMT 0602PDR-MA																	
	060202PDSR-MM			•	•	•	•	•										
	0602PDSR-MM			•	•	•	•	•	•									
	060208PDSR-MM			•	•	•	•	•										
	060212R-MM			•	•	•												
	060216R-MM				•													
1500 Тип	APMT 0903PDR-MA																	
	0903PDR-ML						•											
	0903PDSR-MM			•	•	•	•	•										
	090308PDSR-MM			•	•	•	•	•										
	090312R-MM				•	•	•	•										
	090316R-MM				•	•	•	•										
	090320R-MM				•	•												

Рекомендации по выбору СМП

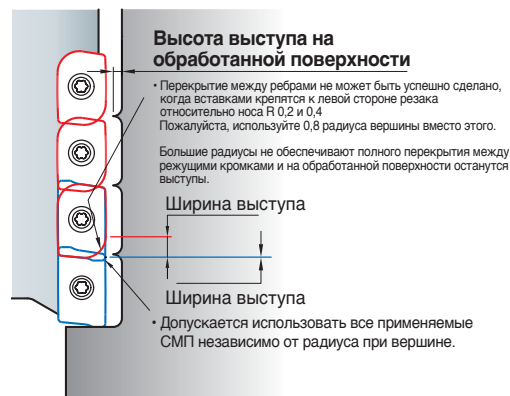

Комплектующие



Тип	Винт кассеты	Ключ	Ключ	Диаметр фрезы, мм
1000 Тип	FTKA01842	-	TW06S-A	Ø10~Ø63
1500 Тип	FTKA02565S	TW08S	-	Ø16~Ø100