


FMAC(M)4000-A

(Алюминевый корпус)

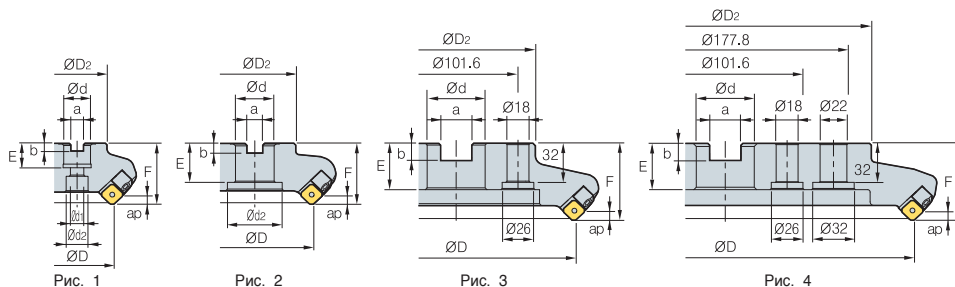

Обозначение	ØD	ØD ₂	Ød	a	b	E	F	Ød ₁	Ød ₂	ap	kg	Рис.
FMAC(M) 4063R-A	63	49	22	10.4	6.3	20	50	11	18	6.5	0.6	1
4080R-A	80	67	25.4(27)	9.5(12.4)	6(7)	25(22)	50	13.5	20	6.5	0.8	1
4100R-A	100	67	31.75(32)	12.7(14.4)	8(8)	32	50	-	45	6.5	1.1	2
4100R-25.4-A	100	67	25.4	9.5	6	25	50	-	38	6.5	1.2	2
4125R-A	125	87	38.1(40)	15.9(16.4)	10(9)	38(35)	63	-	56	6.5	1.7	2
4125R-25.4-A	125	70	25.4	9.5	6	25	63	-	38	6.5	1.8	2
4160R-A	160	107	50.8(40)	19.0(16.4)	11(9)	38(35)	63	-	75	6.5	2.5	2
4200R-A	200	130	47.625(60)	25.4(25.7)	14(14)	38(32)	63	-	-	6.5	3.2	3
4250R-A	250	180	47.625(60)	25.4(25.7)	14(14)	38	63	-	-	6.5	4.1	3
4315R-A	315	240	47.625(60)	25.4(25.7)	14(14)	38	63	-	-	6.5	6.7	4

Note) Through coolant Тип between Ø50~Ø125

() Метрическая система

Применяемые СМП

SEET-MF	SEET-MM	SEET-MA	SEXT-MF											
Обозначение	Тв. сплав с покрытием					Кермет		Тв. сплав		Стр.				
	NCM325	NCM335	PC3500	PC5300	PC9530	PC215K	PD2000	CN2000	CN20		CN30	H01	G10	ST30A
SEET 14M4AGFN-MA														
14M4AGSN-MF	•	•	•	•	•									
14M4AGSN-MM	•	•	•	•	•									
SEXT 14M4AGSN-MF	•	•	•	•	•									
14M4AGSN-MM	•	•	•	•	•									
14M4AGSN-MR	•	•	•	•	•									
SEEW 14M4AGTN											•			
14M4AGFN-W														
14M4AGSN-W														
14M4AGTN-W														

Применяемые оправки

Обозначение	Ød	Оправка с хвостовиком BT
FMAC(M) 4063R-□	22	BT□□-FMC22-□□
4080R-□	25.4	BT□□-FMA25.4-□□
	27	BT□□-FMC27-□□
4100R-□	31.75	BT□□-FMA31.75-□□
	32	BT□□-FMC32-□□
4125R-□	38.1	BT□□-FMA38.1-□□
	40	BT□□-FMB40-□□
4160R-□	50.8	BT□□-FMA50.8-□□
	40	BT□□-FMB / FMC40-□□
4200R-□	47.625	BT□□-FMA47.625-□□
4250R-□	60	BT□□-FMB60-□□
4315R-□	60	BT□□-FMB60-□□

Комплектующие



FTGA03512 TW15S HW40L LFMA4R-A DHA0830

Применяемые СМП E15, E16

Присоединительные размеры смотреть на стр. E270~E272
korloy@korloy-tools.ru
www.korloy-tools.ru

• Наличие на складе

