

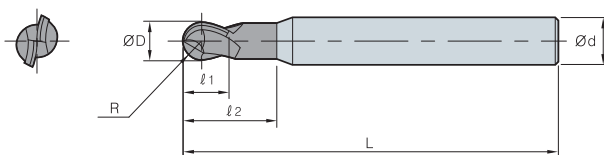
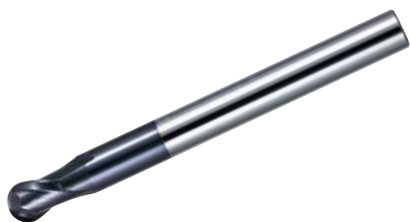


HPBE2000 (Сферическая форма) / 2000L (Сферическая удлиненная форма)

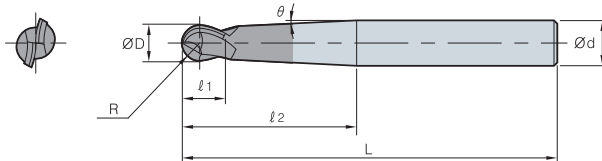

HPBE2000T (Сферическая форма с конической шейкой)

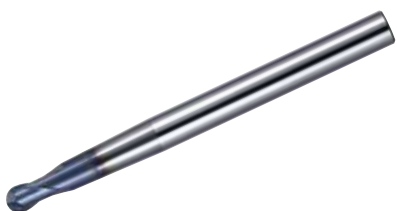

ØD	Предельные отклонения	Предельные отклонения R
Ø0.6 ~ Ø6	0 ~ -0.02	± 0.005
Ø7 ~ Ø16	0 ~ -0.025	± 0.010

(мм)

Обозначение	R	ØD	Ød	ℓ ₁	ℓ ₂	L	θ°
HPBE 2006	0.3	0.6	6	1.2	4	50	
2008	0.4	0.8	6	1.6	4	50	
2010	0.5	1	6	2	4	50	
2020	1	2	6	3	6	50	
2030	1.5	3	6	4	8	50	
2040	2	4	6	5	10	60	
2050	2.5	5	6	6	12	60	
2060	3	6	6	7	14	60	
2070	3.5	7	8	8	16	80	
2080	4	8	8	9	18	80	
2090	4.5	9	10	10	20	80	
2100	5	10	10	11	22	80	
2110	5.5	11	12	12	24	90	
2120	6	12	12	13	26	90	
2140	7	14	16	15	30	100	
2160	8	16	16	17	34	100	
HPBE 2060L	3	6	6	7	14	90	
2070L	3.5	7	8	8	16	90	
2080L	4	8	8	9	18	100	
2090L	4.5	9	10	10	20	100	
2100L	5	10	10	11	22	100	
HPBE 2010-T2-26	0.5	1	6	2	26	55	1
2010-T4-16	0.5	1	6	2	16	50	2
2020-T2-41	1	2	6	3	41	70	1
2020-T4-29	1	2	6	3	29	60	2
2030-T2-51	1.5	3	6	4	51	80	1
2030-T4-29	1.5	3	6	4	29	60	2
2040-T2-61	2	4	6	5	61	90	1
2040-T4-34	2	4	6	5	34	70	2
2060-T2-63	3	6	6	7	63	90	1
2060-T4-35	3	6	6	7	35	90	2
2080-T2-67	4	8	8	11	67	100	1
2080-T4-39	4	8	8	11	39	100	2
2100-T2-69	5	10	10	13	69	120	1
2100-T4-41	5	10	10	13	41	120	2
2120-T2-71	6	12	12	15	71	130	1
2120-T4-43	6	12	12	15	43	130	2

