


VFE4000 (Цилиндрическая)



$\varnothing D$	Предельные отклонения
$\varnothing 3 \sim \varnothing 9$	0.00 ~ -0.02
$\varnothing 10 \sim \varnothing 16$	0.00 ~ -0.03

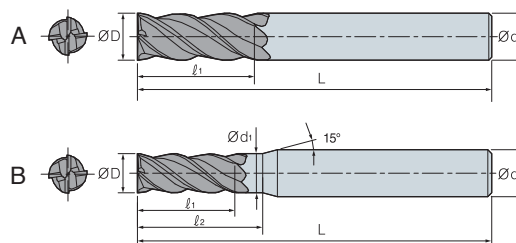

(мм)

Обозначение	$\varnothing D$	$\varnothing d$	d1	l_1	l_2	L	Тип
VFE 4025-045	2.5	6.0	2.48	6.0	8.0	45	B
4030-050	3.0	6.0	2.98	7.0	9.5	50	B
4035-050	3.5	6.0	3.48	8.0	11.0	50	B
4040-050	4.0	6.0	3.98	9.0	12.0	50	B
4050-050	5.0	6.0	4.98	12.0	16.0	50	B
4060-050	6.0	6.0	-	14.0	-	50	A
4070-060	7.0	8.0	6.97	16.0	21.0	60	B
4080-060	8.0	8.0	-	19.0	-	60	A
4090-070	9.0	10.0	8.97	20.0	27.0	70	B
4100-075	10.0	10.0	-	23.0	-	75	A
4120-080	12.0	12.0	-	27.0	-	80	A
4140-085	14.0	14.0	-	31.0	-	85	A
4160-090	16.0	16.0	-	36.0	-	90	A

