


IFE2000/4000 (Цилиндрическая удлиненная)

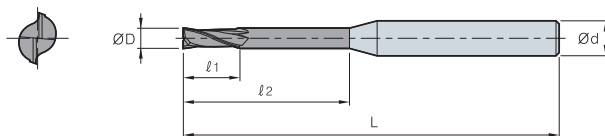

ØD	Предельные отклонения
Ø1.0 ~ Ø8.0	0 ~ -0.020
Ø8.5 ~ Ø11.5	0 ~ -0.025
Ø12.0 ~ Ø20.0	0 ~ -0.030

(mm)

Обозначение	ØD	Ød	ℓ1	ℓ2	L	
IFE 	2030-050	3	6	12	15	50
	2040-050	4	6	15	20	50
	2050-060	5	6	20	25	60
	2060-060	6	6	20	-	60
	2080-070	8	8	25	-	70
	2100-090	10	10	30	-	90
	2120-090	12	12	30	-	90
	2140-110-S14	14	14	40	-	110
	2140-110	14	16	40	45	110
	2160-110	16	16	50	-	110
	2180-110-S18	18	18	50	-	110
	2180-110	18	20	50	55	110
2200-110	20	20	55	-	110	
IFE 	4030-050	3	6	12	15	50
	4040-050	4	6	15	20	50
	4050-060	5	6	20	25	60
	4060-060	6	6	20	-	60
	4080-070	8	8	25	-	70
	4100-090	10	10	30	-	90
	4120-090	12	12	30	-	90
	4140-110-S14	14	14	40	-	110
	4140-110	14	16	40	45	110
	4160-110	16	16	50	-	110
	4180-110-S18	18	18	50	-	110
	4180-110	18	20	50	55	110
4200-110	20	20	55	-	110	

