


IFE2000-T (Коническая усеченная)

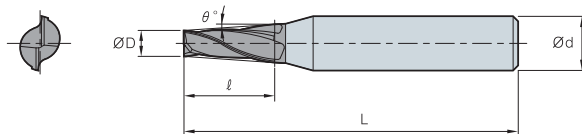

ØD	Предельные отклонения
Ø1.0 ~ Ø8.0	0 ~ -0.020
Ø8.5 ~ Ø11.5	0 ~ -0.025
Ø12.0 ~ Ø20.0	0 ~ -0.030

(mm)

Обозначение	ØD	Ød	L	ℓ	θ°
IFE					
2 2120-075-T30	12	16	75	30	3°
2130-075-T05	13	14	75	30	0.5°
2130-075-T10	13	14	75	30	1°
2130-075-T15	13	16	75	30	1.5°
2130-075-T20	13	16	75	30	2°
2130-075-T25	13	16	75	30	2.5°
2130-075-T30	13	18	75	30	3°
2140-080-T05	14	16	80	35	0.5°
2140-080-T10	14	16	80	35	1°
2140-080-T15	14	16	80	35	1.5°
2140-080-T20	14	18	80	35	2°
2140-080-T25	14	18	80	35	2.5°
2140-080-T30	14	18	80	35	3°
2150-080-T05	15	18	80	35	0.5°
2150-080-T10	15	18	80	35	1°
2150-080-T15	15	18	80	35	1.5°
2150-080-T20	15	18	80	35	2°
2150-080-T25	15	20	80	35	2.5°
2150-080-T30	15	20	80	35	3°
2160-090-T05	16	20	90	40	0.5°
2160-090-T10	16	20	90	40	1°
2160-090-T15	16	20	90	40	1.5°
2160-090-T20	16	20	90	40	2°
2160-090-T25	16	20	90	40	2.5°
2160-090-T30	16	22	90	40	3°

