
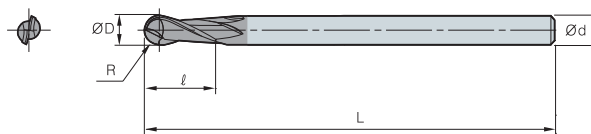


IBE2000 (Сферическая удлиненная)

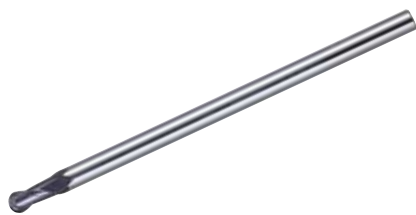


ØD	Точность	R Точность
1.0 ~ 8.0	0 ~ - 0.020	±0.01
9.0 ~ 10.0	0 ~ - 0.025	±0.01
12.0 ~ 20.0	0 ~ - 0.030	±0.01

(MM)

Обозначение	R	ØD	Ød	ℓ	L
IBE 2030-100	1.5	3	6	7	100
2040-100	2	4	6	9	100
2060-115	3	6	6	12	115
2080-140	4	8	8	16	140
2100-180	5	10	10	20	180
2120-200	6	12	12	23	200
2160-250	8	16	16	30	250
2200-250	10	20	20	38	250

IBE2000-T (Сферическая)

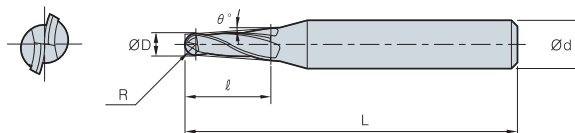

ØD	Предельные отклонения	Предельные отклонения R
Ø1.0 ~ Ø8.0	0 ~ - 0.020	±0.01
Ø9.0 ~ Ø10.0	0 ~ - 0.025	±0.01
Ø12.0 ~ Ø20.0	0 ~ - 0.030	±0.01

(MM)

Обозначение	R	ØD	Ød	ℓ	L	θ°
IBE 2030-045-T05	1.5	3	6	10	45	0.5°
2030-045-T10	1.5	3	6	10	45	1°
2030-045-T15	1.5	3	6	10	45	1.5°
2030-045-T20	1.5	3	6	10	45	2°
2030-045-T25	1.5	3	6	10	45	2.5°
2030-045-T30	1.5	3	6	10	45	3°
2040-045-T05	2	4	6	12	45	0.5°
2040-045-T10	2	4	6	12	45	1°
2040-045-T15	2	4	6	12	45	1.5°
2040-045-T20	2	4	6	12	45	2°
2040-045-T25	2	4	6	12	45	2.5°
2040-045-T30	2	4	6	12	45	3°
2050-050-T05	2.5	5	6	15	50	0.5°
2050-050-T10	2.5	5	6	15	50	1°
2050-050-T15	2.5	5	6	15	50	1.5°
2050-050-T20	2.5	5	6	15	50	2°
2050-050-T25	2.5	5	8	15	50	2.5°
2050-050-T30	2.5	5	8	15	50	3°
2060-050-T05	3	6	8	15	50	0.5°
2060-050-T10	3	6	8	15	50	1°
2060-050-T15	3	6	8	15	50	1.5°
2060-050-T20	3	6	8	15	50	2°