
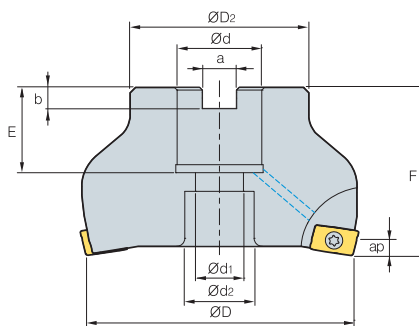


AMC(M)3000SE



• AR : 45°
• RR : 0°

(MM)

| Обозначение | | ØD | ØD ₂ | Ød | Ød ₁ | Ød ₂ | a | b | E | F | ap | |
|-----------------------|---|-----|-----------------|-----------|-----------------|-----------------|------------|----------|--------|----|----|-----|
| AMC(M) 3080HSE | 4 | 80 | 57 | 25.4(27) | 14 | 20 | 9.5(12.4) | 6.0(7.0) | 25(22) | 50 | 6 | 1.3 |
| 3100HSE | 5 | 100 | 67 | 31.75(32) | 18 | 26 | 12.7(14.4) | 8.0(8.0) | 32(28) | 63 | 6 | 2.3 |

• () Метрическая система

Применяемые СМП

APMT-MM

APMT-MF




| Обозначение | Тв. сплав с покрытием | | | | | | | | | Кермет | | | Тв. сплав | | Стр. | | |
|------------------|-----------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|------|-----------|-----|------|-----|-------|
| | NCM325 | NCM335 | NC5330 | PC3500 | PC5300 | PC3545 | PC9530 | PC6510 | PC215K | PD2000 | CN2000 | CN20 | CN30 | H01 | | G10 | ST30A |
| APMT 1604PDSR-MM | ● | | ● | ● | ● | ● | ● | ● | | | | | | | | | |
| 1604PDSR-MF | ● | | ● | ● | ● | ● | | | | | | | | | | | |
| 160410PDSR-MM | ● | | ● | ● | ● | ● | | | | | | | | | | | |
| 160416PDSR-MM | ● | | ● | ● | ● | ● | | | | | | | | | | | |
| 160424R-MM | ● | | ● | ● | ● | ● | | | | | | | | | | | |
| 160430R-MM | ● | | ● | ● | ● | ● | | | | | | | | | | | |
| 160432R-MM | ● | | ● | ● | ● | ● | | | | | | | | | | | |

Применяемые оправки

| Обозначение | Ød | Оправка с хвостовиком BT |
|----------------|-------|--------------------------|
| AMC(M) 3080HSE | 25.4 | BT□□-FMA25.4-□□ |
| | 27 | BT□□-FMC27-□□ |
| 3100HSE | 31.75 | BT□□-FMA31.75-□□ |
| | 32 | BT□□-FMC32-□□ |

Комплектующие



FTKA0410

TW08S

