


Оправки для крепления дисковых фрез I

BT-SCA

MAS403-BT

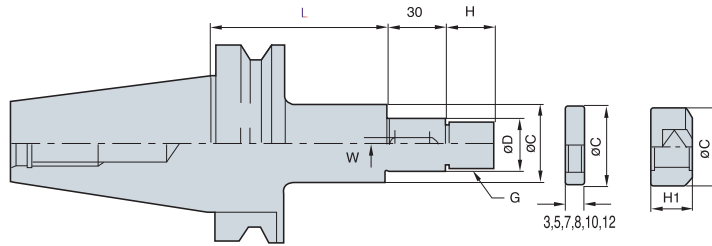

(mm)									
Обозначение	Диаметр фрезы, мм	ØD	L	H	W	ØC	H1	G	 kg
BT30 - SCA12.7 - 60	50	12.7	60	15	-	20	12	M12x1.25	0.6
SCA15.875 - 60	50-60	15.875	60	16	3.18	26	13	M14x1.5	0.7
SCA22.225 - 60	60-63-75	22.225	60	21	3.18	34	18	M20x1.5	0.8
SCA25.4 - 60	75-80	25.4	60	25	6.35	40	21	M24x2	0.9
BT40 - SCA13 - 75	50	13	75	15	-	20	12	M12x1.25	1.3
105	50	13	105	15	-	20	12	M12x1.25	1.4
SCA16 - 75	50-60	16	75	16	4	26	13	M14x1.5	1.4
105	50-60	16	105	16	4	26	13	M14x1.5	1.5
SCA22 - 75	60-63-75	22	75	21	6	34	8	M20x1.5	1.6
105	60-63-75	22	105	21	6	34	8	M20x1.5	1.9
SCA27 - 75	75-80-100-125	27	75	25	7	40	21	M24x2	2.1
120	75-80-100-125	27	120	25	7	40	21	M24x2	2.5
SCA32 - 105	100-125-150-175	32	105	30	8	46	26	M30x2	2.6
SCA12.7 - 75	50	12.7	75	15	-	20	12	M12x1.25	1.3
105	50	12.7	105	15	-	20	12	M12x1.25	1.4
SCA15.875 - 75	50-60	15.875	75	16	3.18	26	13	M14x1.5	1.4
105	50-60	15.875	105	16	3.18	26	13	M14x1.5	1.5
SCA22.225 - 75	60-63-75	22.225	75	21	3.18	34	18	M20x1.5	1.6
120	60-63-75	22.225	120	21	3.18	34	18	M20x1.5	1.9
SCA25.4 - 75	75-80-100-125	25.4	75	25	6.35	40	21	M24x2	2.1
120	75-80-100-125	25.4	120	25	6.35	40	21	M24x2	2.5
SCA31.75 - 105	100-125-150-175	31.75	105	30	7.92	46	26	M30x2	2.6
BT50 - SCA13 - 75	50	13	75	15	-	20	12	M12x1.25	3.7
105	50	13	105	15	-	20	12	M12x1.25	3.8
SCA16 - 90	50-60	16	90	16	4	26	13	M14x1.5	4.0
120	50-60	16	120	16	4	26	13	M14x1.5	4.1
SCA22 - 90	60-63-75	22	90	21	6	34	18	M20x1.5	4.3
135	60-63-75	22	135	21	6	34	18	M20x1.5	4.6
SCA27 - 90	75-80-100-125	27	90	25	7	40	21	M24x2	4.7
135	75-80-100-125	27	135	25	7	40	21	M24x2	5.1
SCA32 - 90	100-125-175-200	32	90	30	8	46	26	M30x2	5.1
135	100-125-175-200	32	135	30	8	46	26	M30x2	5.7
SCA40 - 90	150-160-175-200	40	90	36	10	55	31	M36x2	5.8
135	150-160-175-200	40	135	36	10	55	31	M36x2	6.8
SCA12.7 - 75	50	12.7	75	15	-	20	12	M12x1.25	3.7
105	50	12.7	105	15	-	20	12	M12x1.25	3.8
SCA15.875 - 90	50-60	15.875	90	16	3.18	26	13	M14x1.5	4.0
120	50-60	15.875	120	16	3.18	26	13	M14x1.5	4.1
SCA22.225 - 90	60-63-75	22.225	90	21	3.18	34	18	M20x1.5	4.3
BT50 - SCA22.225-135	60-63-75	22.225	135	21	3.18	34	18	M20x1.5	4.6
SCA25.4 - 90	75-80-100-125	25.4	90	25	6.35	40	21	M24x2	4.7
135	75-80-100-125	25.4	135	25	6.35	40	21	M24x2	5.1
SCA31.75 - 90	100-125-150-175-200	31.75	90	30	7.92	46	26	M30x2	5.1
135	100-125-150-175-200	31.75	135	30	7.92	46	26	M30x2	5.7
SCA38.1 - 90	150-160-175-200	38.1	90	36	9.52	55	31	M36x2	5.8
135	150-160-175-200	38.1	135	36	9.52	55	31	M36x2	6.8

- JIS B4219, 4109, 4107 для торцевых фрез
- Шпонка входит в базовую комплектацию.

